

QUESTIONNAIRE



INCLINED SPIKED LATTICE ASSEMBLY

DIMENSIONAL DETAILS TO BE FILLED BY THE MILLS FOR INCLINED SPIKED LATTICE


1. Fill centre to centre distance between the lattice rollers X = mm

Fill Dia Meter of Lattice Rollers in MM





2. Total number of wooden lags (No. of pieces) per lattice = mm

Wooden Lag Thickness X = mm | Wooden Lag Height Y = mm






3. Distance of Spike Edge from base canvas cloth X = mm

Distance of Spike Edge from Wooden Lag Outer Z = mm

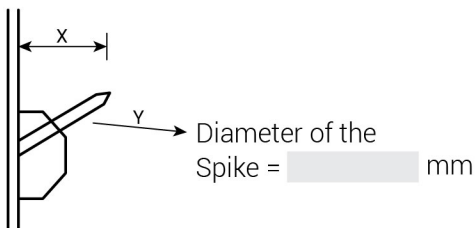

4. Tick Shape of Wooden Lag = A, B or C



QUESTIONNAIRE



INCLINED SPIKED LATTICE ASSEMBLY


5. No. of Rows of Belt at back side of lattice = rows (3 or 4 or 5)

Distance from Side to the Belt X = mm

Width of the Belt Y = mm

Distance between Belts Z = mm



Thickness of the Belt = mm

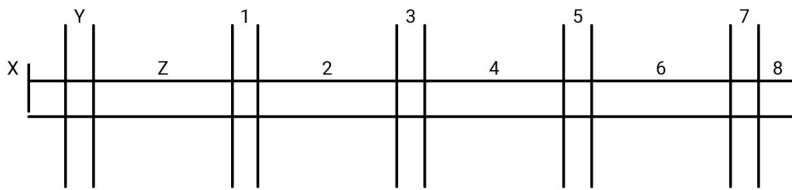

6. No. of Spikes per Wooden Lag = nos



Arrangement of spikes = Zigzag mm

OR Straight mm

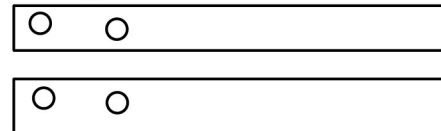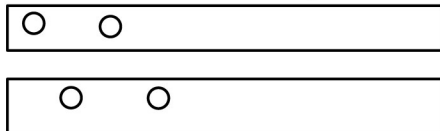

7. Total Width of Lattice X = mm

Total Outer Circumference of Lattice Y = mm



8. Machine

Model no.

Com no.

Year